

Prodigy® Cube Ice Machines up to 636 kg



Features

Prodigy® cubers use **significantly less energy and water** than other cube ice machines, exceeding energy efficiency regulations.

AutoAlert™ indicator lights constantly communicate about operating status and actually signal your staff when it's time to descale, sanitize, and more - making upkeep practically foolproof.

The patented **WaterSense adaptive purge control** delivers maximum reliability by reducing scale buildup for a longer time between cleanings.


Preventative maintenance is simpler than ever with easily-removed panels allowing clear access to internal components and a diagnostic code display insuring the right fix the first time. Reusable air filter is easily removable from the outside.

All external panel components are crafted for **optimal aesthetic appeal** through superior fit and finish.

An optional **advanced feature Smart-Board™** provides additional operational data that can be displayed on-screen or transmitted remotely, resulting in early alert and fast diagnosis of operating issues.

An optional **Vari-Smart™ ultrasonic ice level control** sensor allows you flexibility to program ice levels, for up to 7 days, keeping just the right amount of freshly made ice in the bin.

Matching Bins

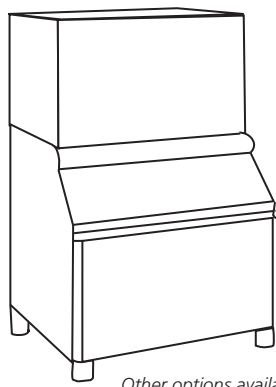

SB 948

Other options available

Technologies



		21°C : 10°C	32°C : 21°C
		[kg] [lb] N°	[kg] [lb] N°
C 1448 MA		636 1399 63600	480 1056 48000
C 1448 SA		636 1399 127200	480 1056 96000
C 1448 MR		616 1355 61600	472 1038 47200
C 1448 SR		616 1355 123200	472 1038 94400


*Estimate number of cubes.



[V/Hz/ph]
220-240/50/1



R404A



This product qualifies for the following listings:




Small Cube
22 x 22 x 9.5 mm
7/8" x 7/8" x 3/8"




Medium Cube
22 x 22 x 22 mm
7/8" x 7/8" x 7/8"

Other models in this range:
C 0322 - C 0522 - C 0530
C 0630 - C 0830 - C 1030
C 1848 - C 2148

Prodigy® Cube Ice Machines up to 636 kg

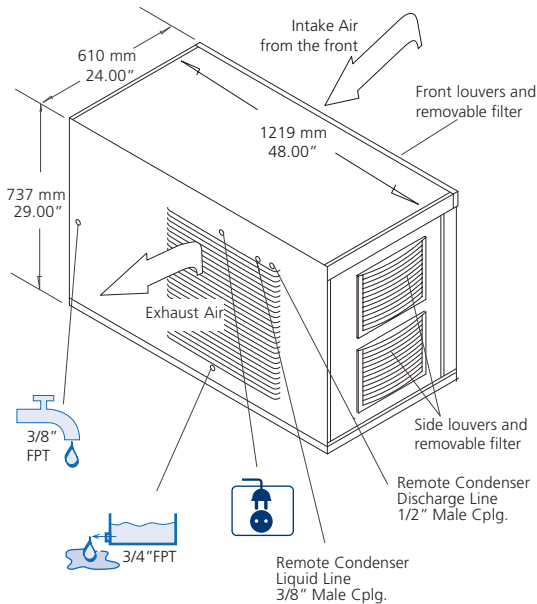

Installation note:
allow 152 mm space at left and back side for ventilation and utility connections.

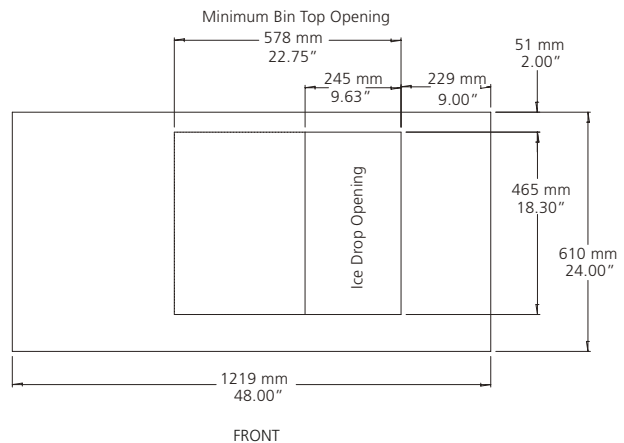

48" Prodigy Plus plan view

Minimum		Maximum
10°C (50°F)		40°C (100°F)
5°C (40°F)		35°C (95°F)
-10%		+10%
1 bar 14 psi		5 bar 70 psi

	+C° -C°	[Btu/h] [W]	[Ømm²]	[W]	FUZE	100 kg [kWh] - 100 kg	[l/h]	32°C 90°F 21°C 70°F [gal/h]	[kg] [lb]	[kg] [lb]
C 1448 MA		20000 5850	3 x 2,5	2430	25 A	7,5	26,0	7,0	139 305	157 345
C 1448 SA		20000 5850	3 x 2,5	2430	25 A	7,5	26,0	7,0	139 305	157 345
C 1448 MR		20000 5850	3 x 2,5	2500	25 A	7,9	26,0	7,0	139 305	157 345
C 1448 SR		20000 5850	3 x 2,5	2500	25 A	7,9	26,0	7,0	139 305	157 345

IMPORTANT NOTICE:
Models and specifications are subject to change without notice.
This spec sheet is meant for commercial purpose only.
For technical documentation please refer to our service manuals.

www.scotsman-ice.it
www.scotsman-ice.com

Scotsman®
Ice Systems

Milano Madrid Chicago Dubai Singapore Shanghai Johannesburg