



C 1848

Other models in this range: C 0322 - C 0522 - C 0530 C 0630 - C 0830 - C 1030 C 1448 - C 2148

Prodigy® Cube Ice Machines up to 736 kg





Prodigy® cubers use significantly less energy and water than other cube ice machines, exceeding energy efficiency regulations.

AutoAlert™ indicator lights constantly communicate about operating status and actually signal your staff when it's time to descale, sanitize, and more making upkeep practically foolproof.

The patented WaterSense adaptive purge control delivers maximum reliability by reducing scale buildup for a longer time between cleanings.

Preventative maintenance is simpler than ever with easily-removed panels allowing clear access to internal components and a diagnostic code display insuring the right fix the first time. Reusable air filter is easily removable from the outside.

All external panel components are crafted for **optimal aesthetic appeal** through superior fit and finish.

An optional **advanced feature Smart-Board™** provides additional operational data that can be displayed on-screen or transmitted remotely, resulting in early alert and fast diagnosis of operating issues.

An optional Vari-Smart™ ultrasonic ice level control sensor allows you flexibility to program ice levels, for up to 7 days, keeping just the right amount of freshly

Matching Bins



Technologies








	— +C°	24h	ૄ૽ :♣૿ૼૺ			
	 	21°C : 10°C	32°C : 21°C			
		[kg] [lb] N°₽*	[kg] [lb] N° 🕸*			
C 1848 MA	4	736 1619 73600	590 1298 59000			
C 1848 SA	*	736 1619 147200	590 1298 118000			
C 1848 SR	4	714 1571 142800	636 1399 127200			

*Estimate number of cubes.







[WxDxH mm] 1219 x 610 x 737 [WxDxH inches] 48"x 24"x 29

This product qualifies for the following listings:





Small Cube 22 x 22 x 9.5 mm 7/8"x 7/8"x 3/8"



Medium Cube 22 x 22 x 22 mm 7/8"x 7/8"x 7/8"







C 1848

Other models in this range: C 0322 - C 0522 - C 0530 C 0630 - C 0830 - C 1030 C 1448 - C 2148

Prodigy® Cube Ice Machines up to 736 kg

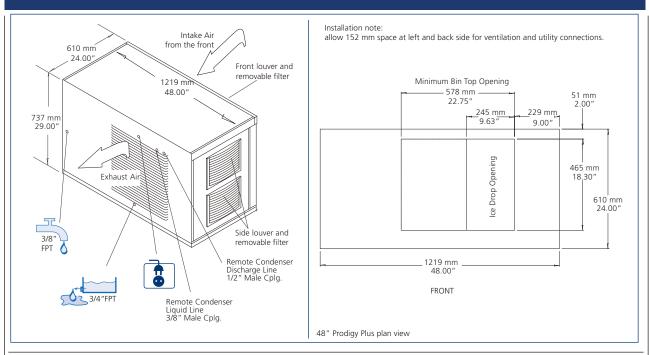



	+0°		1	77 1235		100 kg		32°C 90°F 21°C 70°F		E P
		[Btu/h] [W]	[Ømm ²]	[W]	FUSE	[kWh] - 100 kg	[l/h]	[gal/h]	[kg] [lb]	[kg] [lb]
C 1848 MA	+	27400 8000	3 x 2,5	2500	30 A	8,8	33,5	8,9	143 315	161 355
C 1848 SA	4	27400 8000	3 x 2,5	2500	30 A	8,8	33,5	8,9	143 315	161 355
C 1848 SR	4	27400 8000	3 x 2,5	2550	30 A	8,6	33,5	8,9	143 315	161 355

IMPORTANT NOTICE:

Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.

www.scotsman-ice.it www.scotsman-ice.com



Milano Madrid Chicago Dubai Singapore Shanghai Johannesburg