Self Contained Ice Machine up to 130 kg

EC 206 EASY FIT



Self Contained Ice Machine up to 130 kg

Item #:	
Project:	
Quantity:	



FEATURES

- Produces individual Gourmet crystal clear supercubes.
- Resistant stainless steel exterior.
- Front panel in and out airflow (air cooled model only) for built-in installation.
- Front access condenser air filter, removable and washable (air cooled model only).
- Easily accessible front ON-OFF switch. Routine maintenance visible alarm light on front panel.
- Ergonomically designed ice storage access, with disappearing door. Door-closing movement dampening system.
- Vapor-based microbial control system pouch in ice storage
- PWD Progressive Water Discharge: pumps excess residual water up to a distance of 15 meters.



EC L 206 Large Gourmet 39 g Ø 38 x H 41 mm



EC M 206 Medium Gourmet 20 g Ø 30 x H 34 mm



EC S 206 Small Gourmet 8 g Ø 21 x H 25 mm

CONDENSING SYSTEM	INTERNAL BIN CAPACITY			
Air cooled Water cooled		50 kg		
REFRIGERANT GAS	OPERATING REQUIREMENTS			
R404A		Minimum	Maximum	
	Air temperature	10°C	43°C	
VOLTAGE V/Hz/ph	Water temperature	5°C	38°C	
230/50/1	Water pressure	1 bar (14 psi)	5 bar (70 psi)	
230/60/1	Electrical voltage	-10%	+10%	

Certifications:


















EC 206 EASY FIT



Self Contained Ice Machine up to 130 kg

Item #:
Project:
Quantity:

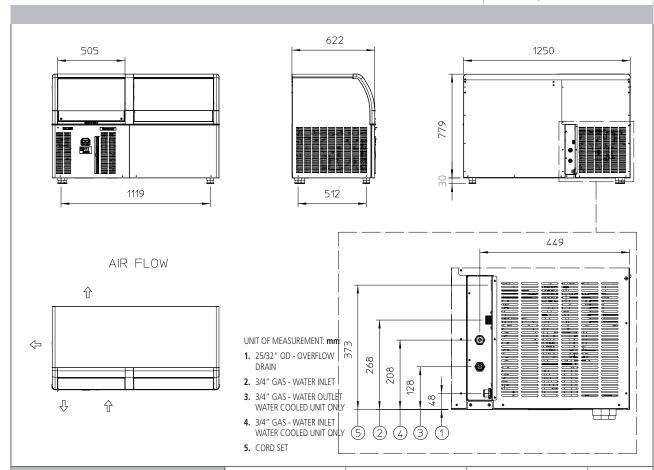

UNIT DATA	
Size (W x D x H)	1250 x 622 x 809 mm
Net weight	84 kg
SHIPPING DATA	

Carton (W x D x H)	1320 x 690 x 960 mm
Weight	97 kg

		Compressor		Circuit wires		Max. fuse size	
Version	Voltage	Btu/h	w	No.	Ømm²	Α	
EC L 206 AS	230/50/1	7165	2100	3	1.5	16	
EC M 206 AS	230/50/1	6039	1770	3	1.5	16	
EC M 206 WS	230/50/1	6039	1770	3	1.5	16	
EC S 206 AS	230/50/1	7165	2100	3	1.5	16	
EC M 206 AS	230/60/1	6995	2050	3	1.5	16	

			24 h ice production kg		Energy		Water	Instant	
			°C Amb. / °C Water		consumption*		usage*	power	
Version	Condensation	Voltage	10°C/10°C	21°C/10°C	32°C/21°C	kWh/100 kg	kWh/24h	l/h	W
EC L 206 AS	Air	230/50/1	126	117	92	21.6	20.5	9.6	950
EC M 206 AS	Air	230/50/1	130	123	91	19.9	18.1	10.8	850
EC M 206 WS	Water	230/50/1	128	126	108	14.9	16.1	81.3	760
EC S 206 AS	Air	230/50/1	100	93	72	29.8	21.3	7.5	950
EC M 206 AS	Air	230/60/1	130	123	91	24.0	21.8	12.5	1050
1									

^(*) Data refer to 32°C Amb. / 21°C Water temperature conditions