


### **PRODUCT FEATURES**

- Individually shaped crescent ice.
- Protected by HoshiGuard Antimicrobial Agent.
- CycleSaver® technology includes a double-sided evaporator, uniquely crafted in stainless steel, which produces ice on both sides, resulting in more ice in less
- EverCheck™ Control Board with audible alarm and diagnostic features, designed to assist service technicians in diagnosing problems.
- Accessible digital operation panel allows for easy identification of operation status and cause of faults.
- Fully automated chemical cleaning function makes cleaning simple and saves time.
- Durable stainless steel exterior.
- Easily removable & cleanable air filters on front panel.
- Accessories: Manual, Scoop, check valve and 150mm adjustable legs included (water filter sold separately)

#### TECHNICAL DRAWING



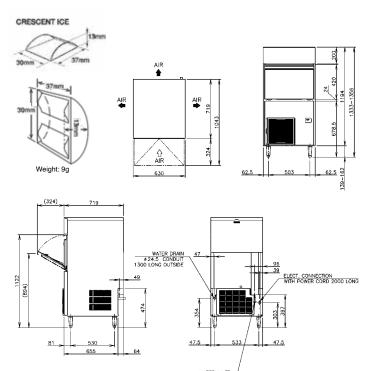

For free 6 month extended warranty, register online within 4 weeks of purchase date.

hoshizaki.com.au

# KM-140C-HC Crescent Ice Maker -

Self-Contained



Model Number: 91000910



## PRODUCT SPECIFICATION

Production Capacity / 24hrs	Approx. 130kg @ 21°C Air temp; 15°C Water Approx. 115kg @32°C Air temp; 21°C Water
Bin Storage Capacity	Approx. 55kg (Bin Control Setting Approx. 47kg)
Freeze Cycle Time	Approx. 21 Min (At. 21°C Air ; 15°C Water)
Ice Production / cycle	Approx. 1.87kg/208pcs
Dimensions	630mm (W) x 719mm (D) x 1194mm (H)
	(1333-1356mm [H] with 150mm
	adjustable legs)
Cooling	Air
Weight Net/Gross (kg)	69/81
AC Supply Voltage	1 PHASE 220-240V 50Hz / 10amp Plug
Amperage	Running: 3.9A
Refrigerant Charge	R290/110g
Operating Conditions:	
Ambient Temp.	7-38°C
Water Supply Temp.	7-32°C
Water Supply Pressure	0.07-0.8MPa (0.7-8bar)
Voltage Range	±6%
Electrical consumption	11.1kWh per 100kg ice (AT. 32°C; WT 21°C)
Water Consumption / 24hrs	Approx. 0.17m3/d (AT. 32°C; WT 21°C)
Compatible Water Filter	HLF20 Filter System (sold separately)

## **INSTALLATION REQUIREMENTS**

- Qualified plumber required for installation.
- Allow 15cm clearance at rear, sides and top for proper air circulation and ease of maintenance.
- Hoshizaki recommends the use of a compatible water filter to prevent non-warrantable scale & sediment complications.

<sup>\*</sup>Refer to manual for full installation & maintenance requirements







