







Black Solid

White Solid



Stainless Solid

Key Features

- Refrigerator volume of 2.1 cu ft holds up to 24 bottles (12 oz) or 44 cans (12 oz)
- Mechanical Dial Control is conveniently located on the grille
- Temperature range: 34°F 45°F
- Daily ice produces up to 18 lbs of ice
- Up to 13 lbs in ice storage capacity
- Crescent ice cube dimensions: 1/2" W x 3/4" H x 2 1/4" L
- No drain required
- Two removable tempered glass shelves

- Two fixed storage compartments in door
- Standard travel package includes door latch, ensuring safe-at-sea storage
- Corrosion and UV resistant components provide product longevity in harsh environments
- Built-in or freestanding

Model Details


Model	Voltage/Hz	Door Swing	Finish	Shipping Weight
UMRI121-BS01A	115 / 60	Field Reversible	Black Solid	94 lb
UMRI121-WS01A	115 / 60	Field Reversible	White Solid	94 lb
UMRI121-SS01A	115 / 60	Field Reversible	Stainless Solid	94 lb


Accessories

Model	Description	Finish	Shipping Weight
ULAWATERHOOKUP	Braided water supply line kit	N/A	2 lb



20 ¾" (527mm) 28 ½" (724mm)

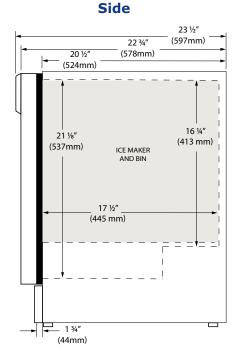


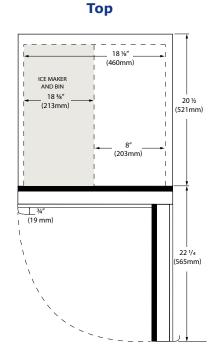


Specifications

Model	MRI121
Amps: Running (115v)	2.5 amps
Amps: Max Start Up (115v)	18 amps
Capacity: Bottle	24 (12oz)
Capacity: Can	44 (12oz)
Capacity: Volume	2.1 cu ft
Defrost Type	Manual
Dimensions: Product Depth	22 3/4"
Dimensions: Product Height	28 1/2"
Dimensions: Product Width	20 3/4"
Ice Production Per Day	18 lb
Ice Storage	13 lb
Product Weight: Max	85 lb
Refrigerant Type	R600a
Temperature Range	34°F - 45°F

Back



Cabinet Cut-Out



Warranty

- 1 Year (parts & labor) / 5 year sealed system (parts)
- + Additional 1 Year (parts & labor) warranty at no cost with product registration

See complete warranty for details



Installation Notes

- No additional clearance around sides, top or rear of unit is needed for ventilation.
 - Do not obstruct front grille air flow



Please visit u-line.com to view this model's User Guide & Service Manual. All Specifications are subject to change without notice.